

ALPINE SANITATION & SUPPLIES LTD. 24 Ronson Drive, Unit 16, Etobicoke, Ontario M9W 1B4 Bus: (416)-744-2120 Fax: (416)-249-1859 Toll Free: 1-800 465-6198





:95 HIF9G.

- HiÁaa&\•ÁÐÁFIÌÁ&[ç^¦•Á\^¦Á@[č¦È
- Ò8[}[{ 38æ¢Åt[Åt]^\aæ^ÈÅV+^•Åt])^ÅFÈÅ *æ¢[[}•Åt-Å æ¢\\Å\^\&& &
- CE | Á@ æç^ˆ Áå` ĉ Á+E A œæ | / • A d^ / Ag | } d` 8E cā | Áæ • ` | ^ • A[] * Áã^ Áæ) å Á ^ æ • A , -Ad [` à |^ -↓^^A] ^ | æā | È
- W}ã`^Á;] ¦æÂ&ek{ Á:^•c^{ A^æč ¦^•Á]]^! æ) åÁ[, ^¦Á:œæ] /••Á:c^A|Á;æ@&eke{ •Á;ãœ |^ā] -{ |&^åA;}åA&ea] •ÈÁÛ] ^&ãæa| ^Åa^•ã] ^åÁ]`||Ü;ã] •Áek|[, Á;æ@&eke{ •Á(A:A*æãî |`/{[ç^åA(; IA&|^æ) ā;*È]
- V[]Á;[`}C*åÁ&[}d[|•Á\$;&|`å^Áa`ådä;Á &@{ a8ca4Á;`{]•Ás;å/å;Å],*A*•C*{ Ác@eac æ•`¦^•Á;![]^¦Á&@{ a8ca4Á*•æ*^È
- CE d[Ácædo⊕d[]Á(æà^•Á)]^¦æaā]}Áæ^Á æ)åÁæ^È
- Q c^* ¦æc^åÁ&¦æjÁ'æÂ, \^ç^} œÁ[[åÁ;[ãÁ;[{ ^} c^i], * Ái¦æjÁ^ • c^{ È



U] cāj}æ; V^Á, Ă, ĂBÙÁ ÁÁ.** @:æ*; Áæ:•`!^^ Áæá(;) cājË `[`•Á`]] ^ Á, ÆT € %24@; c ;æ*; c@æ:*`æ}æ; c^.• ^c&:||^) cA·•`|oÈ



Q,c^*¦æe^å ∙&¦æ} dæî]¦^ç^}o:Á{[ľåÁ+[ã¦Á+][{ ^}c^¦ã):*Á妿3):Á^•c{È



W}ã`^]`||Ëjāj å^•ðr} æ∯[],•Á,æ•@Åæá{•Á(ĮÁà^ ^æ≉ãjʿÁ^{[ç^åA[¦Á&|^æ);Ë

V[] { [` } c^å & &] d[| • a] & ` a^A`a`a[cta] A&@{ a&a#] ` {] • a} å a^|a[a] * • • • { c@ec ae • ` ! ^ •

] ¦[] ^¦Á&@{ a&a‡Á•ať ^È

ã*È




Ó[, |Á,] cá,}Áæçæáajæà|^Á,[&æa] • ĭ |^Áåã•] ^}•^å] ¦[åĭ &o•È



Ú^{*} {]]^{*} |***ð**|* •^•c{ **d**] {[c/• |^• ^{*}]• •^{*}ec{ **a**] {[c/• |^• ^{*}]e à * [**a**] ææ} • [**a**] æð &@{ **a**} ækæs{^[**c**] c/ ká* ¦Ë **ð** * ka] •^ kæ &|^ É



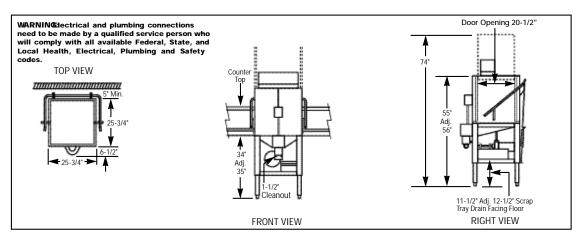

GdYWZWUhjcbg.

AC89@5<	I G5	A9HF <i>≓</i>		I G5	A9HF <i>=</i> 7
OPERATING CAPACITY RACKS PER HOUR			WASH PUMP MOTORS HP	1	1
(NSF RATED)	37	37	DIMENSIONS		
OPERATING CYCLE			DEPTH	25-3/4"	(65.4cm)
WASH TIME-SEC	45	45	WIDTH	25-3/4"	(65.4cm)
RINSE TIME-SEC	30	30	HEIGHT	55"-56"	(140cm-142.2cm)
DWELL TIME-SEC	15	15	STANDARD		, , ,
TOTAL CYCLE TIME	90	90	TABLE HEIGHT	34"	(86cm)
WASH TANK CAPACITY	1.7 GAL.	(6.45 L)	MAXIMUM CLEARANCE		
PUMP CAPACITY	52 GPM	(197 LPM)	FOR DISHES	17"	(43cm)
OPERATINGTEMPERATURE			STANDARD DISHRACK	1	1
REQUIRED	120°F	(49°C)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
RECOMMENDED	140°F	(60°C)	ELECTRICAL RATING	VOLTS	AMPS
WATER CONSUMPTION				115	16
PER RACK	1.7 GAL.	(6.45 L)		115	10
PER HOUR	74 GPH	(212/280 LPH)			
WATER REQUIREMENTS			SHIPPING WEIGHT		
WATER INLET	3/4"		APPROXIMATE	270#	(110 0/100 Ekg)
DRAIN-I.P.S.	2"	-	APPRUAIWATE	270#	(118.8/122.5kg)

Gia a UfmiGdYWJZJWUhjcbg. `AcXY`5<

Gia a Urm Gol YulyyUulg bg. A CXY 5 < ÔT OED) ^!*^ÁT ā ^!Á[å ^!ÁOEPÁ[, Áv{] ^!æč !^Ék@ { 3&ælÁ æ) ãã ĝ * Ák[{ { ^!&ãælÁkā @ æ @ !Á[^^vo /ÞÙØÉMŠæ) å /ÔÙOE æ) ãæælį } Áæj å &{ } et & &aj } Á ægi à æda * A OVPU W.@ Á • ^A /A -ÓUU ÙVOÙÁ; !ÁOEP S/P OCE/OÜ ÙÉV@ A[[å ^!ÁDEP /ār /k[} et & &câ /à } & a'/`A /A El Á ægi } /•• • c^^|ÉÓæ&@Á } ã/Aeč d { æzælæ] ^ & æ @ • ÉA g • ^ A Áæj ãã ^ • Á[[å Á^!çæ A C] • A (c) g å ada / G A /A /A /A (c) A (c) a /A (c) /A

5 jU)`UV`Y`Cdh]cbg

- Ù[]∄ĐÚ[, å^!,ÅÖ`æ‡Ô[, |ÅÖā]^}•^! ÔT Œ-^{[]]ËŬ`!^^″(ÇU^],Å&[}œaāj^åÅFG,Y Á@eæ^!D Ùæ)ãã^!ÅŒæ{{

- Üczagi μ••• ΑÜc×\|AÖzi @czagi μ•• Á Ūczagi μ••• ΑÜc×\|AÖzi @czagi μ•• Á Œ[c+] zezig×A≨: &|^Acij ∧• A Œ[c+] zezig×A≨|^&Cij &= ZizzajAzig aligazi μ^A[¦A*¢] [[c